

# Boreart Sherbrooke Series



Combining acoustic performance and architectural design, the Sherbrooke Series offers high-end soundproofing panels designed for interior walls and ceilings. Thanks to their sound absorption capacity, they eliminate reverberation and ensure optimal acoustic comfort. Easy to install, these panels are composed of a high-quality real wood veneer laminated onto natural or black MDF for an elegant and durable finish.



## CHARACTERISTICS

|                           |                                                                                                                                               |
|---------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Type                      | Boréart Sherbrooke Series (acoustic option)                                                                                                   |
| Melamine                  | Two (2) standard melamines, White Oak and Black Walnut – other melamines available upon request                                               |
| Nominal panel size        | 24" x 24"   24" x 48"                                                                                                                         |
| Panel material            | Natural or black MDF – Fire resistant                                                                                                         |
| Size and spacing of slats | One size fits all. See drawings.                                                                                                              |
| Acoustic material         | Polyester and recycled plastic felt – 0.35 to 1 inch – 33 color choices, see page 3.<br>Noise Reduction Coefficient (NRC) up to 0.70 to 0.95. |
| Fire resistance           | ASTM E-84 – Class A   Class 1<br>Flame spread index = 0-25, smoke production index = 450 max NAF                                              |
| Environment               | Made from 100% pre-consumer recycled wood, FSC® certified, and subject to an NAF (no added formaldehyde) exemption.                           |
| Use                       | Interior; residential, commercial, and institutional                                                                                          |
| Installation              | Rigid panels and easy installation<br>Vertical or horizontal installation<br>For interior walls and ceilings                                  |
| Others                    | High-performance acoustic properties offering excellent sound reduction<br>Finishing moldings available                                       |

## SHERBROOKE SERIES PANEL WITH QUOTATIONS

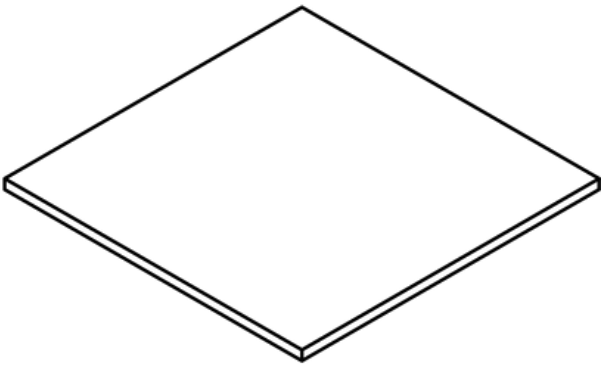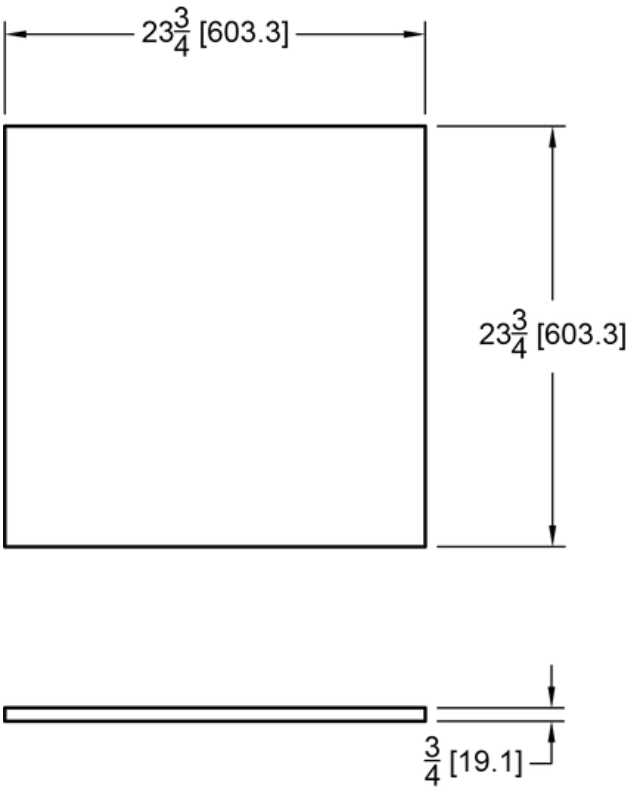

Acoustic material

**Felt - Fire resistant**

Size            24" x 24" | 24" x 48"

Thickness            9 mm  
12 mm  
25,4 mm

**Panel weight**

11,42 lbs | 22,84 lbs

**Panel area**

4 ft<sup>2</sup> | 8 ft<sup>2</sup>

## INSTALLATION

For more details, please refer to the Boreart Sherbrooke Series installation guide on the website.

## MELAMINES



**01** Brushed Bleached Elm



**02** White Oak



**03** Ash Walnut



**04** Black Walnut



**05** Brushed Ash Elm



**06** Black Brushed Elm




**07** Brushed Grey Elm

\*Please note that the colors shown may differ slightly from the actual colors due to variations in display rendering. For more details, please contact Boreart.


## FELT



White



Light grey



Sepia




Camel




Beton




Khaki



Yellow



Amber



Sand



Autumn



Brown



Chocolate



Orange



Tango




Red



Velvet



Grape



Kiwi



Grass green



Tournament green



Dark green




Pine




Aqua blue




Cobalt



Cello blue




Ocean blue




Royal blue




Dark blue



Platinum



Medium grey



Dark ink



Sesame



Black

\*Please note that the colors shown may differ slightly from the actual colors due to variations in display rendering. For more details, please contact Boreart.

## WARRANTY

Boreart offers a 5-year warranty on all its panels. For more details on the limited warranty, please contact Boreart.

## SHIPPING

Boreart products are packaged and shipped in wooden crates and/or on 4' x4' wooden pallets.

## USE & STORAGE

Wood products are hygroscopic by nature and must be installed flat and maintained in a building with a controlled environment. The temperature must be maintained between 15° and 30°C. Relative humidity must be maintained between 25% and 55%.

The advice and recommendations are purely advisory.

Handling and storage – melamine sheets must be stored in such a way as to protect them from moisture and direct sunlight. Melamine sheets should preferably be stored face to face or with the decorative side facing up, flat, completely horizontal, and level.

When handling or moving melamine, it is important that the sheets are lifted above the adjacent sheets to avoid damage that may occur if the sheets are pulled or slid against each other. For larger formats, it is recommended that arched sheets be carried along the longitudinal axis to prevent sagging. Individual sheets can also be rolled up for easier handling.

**Failure to comply with one or more of the above conditions will void the Boréart Architectural Products warranty.**

## HOW TO ORDER

To order a product, please write to **info@boreart.ca** using the following template to ensure maximum accuracy.

The first three characters are the model code, followed by the melamine code, the desired dimensions, the color of the felt as a whole, and the last letters represent the thickness of the felt.



### Pattern

Sherbrooke : SHE

### Colors

See page 3 for the 33 felt color choices.

### Melamines

|                        |     |
|------------------------|-----|
| Brushed Bleached Elm : | OBB |
| White Oak :            | CBL |
| Ash Walnut :           | NCD |
| Black Walnut :         | NNR |
| Brushed Ash Elm :      | OBC |
| Black Brushed Elm :    | OBN |
| Brushed Grey Elm :     | OBG |

### Thickness

|         |
|---------|
| 9 mm    |
| 12 mm   |
| 25,4 mm |