

Boreart Sherbrooke Series

Combining acoustic performance and architectural design, the Sherbrooke Series offers high-end soundproofing panels designed for interior walls and ceilings. Thanks to their sound absorption capacity, they eliminate reverberation and ensure optimal acoustic comfort. Easy to install, these panels are composed of a high-quality real wood veneer laminated onto natural or black MDF for an elegant and durable finish.



CHARACTERISTICS

Type	Boreart Series Sherbrooke (acoustic option)
Melamine	Three (3) standard melamines, White Oak, Brushed Oak and Natural Walnut - other melamines available upon request
Nominal panel size	24" x 24" 24" x 48"
Panel material	Natural or black MDF - Fire-resistant MDF (FR) - Moisture-resistant MDF (MR) - Particleboard
Slat sizes and spacing	One size fits all. See drawing page 2.
Acoustic material	Polyester and recycled plastic felt - 3.5 to 25.4 mm- 33 color choices, see page 3. Noise Reduction Coefficient (NRC) up to 0.70 to 0.95.
Fire resistance	ASTM E-84 - Class A Class 1 Flame spread index = 0-25, smoke production index = 450 max NAF
Environment	Made from 100% pre-consumer recycled wood, FSC® certified, and subject to an NAF (no added formaldehyde) exemption.
Use	Interior; residential, commercial, and institutional
Installation	Rigid panels and easy installation Vertical or horizontal installation For interior walls and ceilings
Others	High-performance acoustic properties offering excellent sound reduction




SHERBROOKE SERIES PANEL WITH QUOTATIONS

Panel weight

11.42 lbs | 22.84 lbs

Panel area

4 ft² | 8 ft²

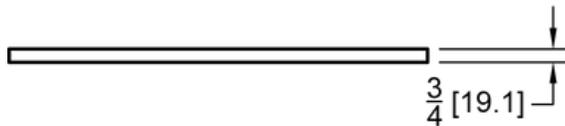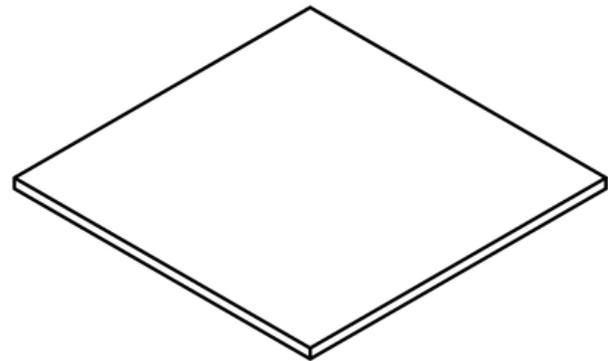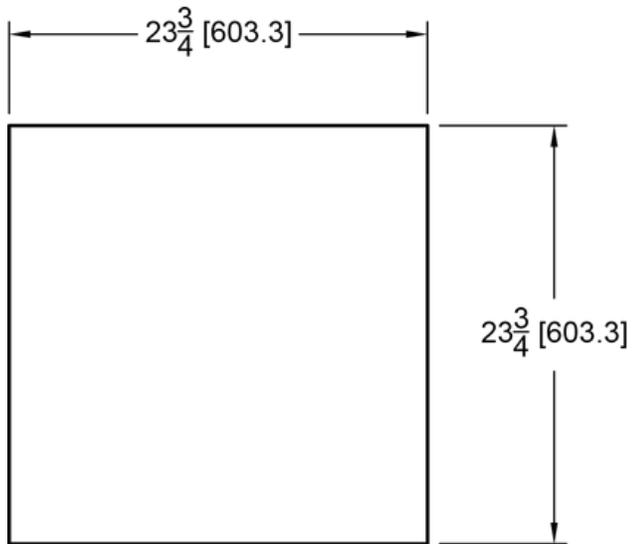

MELAMINES



01 White Oak



02 Brushed Oak



03 Natural Walnut



04 Ash Walnut



05 Black Walnut

*Please note that the colors shown may differ slightly from the actual colors due to variations in display rendering. For more details, please contact Boreart.

WARRANTY

Boreart offers a 1-year limited warranty on all its panels. For more details on the limited warranty, please contact Boreart.

USE & STORAGE

Wood products are hygroscopic by nature and must be installed flat and maintained in a building with a controlled environment. The temperature must be maintained between 15° and 30°C. Relative humidity must be maintained between 25% and 55%.

The advice and recommendations are purely advisory.

Handling and storage - panels must be stored in such a way as to protect them from moisture and direct sunlight. Panels should preferably be stored face to face or with the decorative side facing up, flat, completely horizontal, and level.

When handling or moving panel, it is important that the sheets are lifted above the adjacent sheets to avoid damage that may occur if the sheets are pulled or slid against each other. For larger formats, it is recommended that arched sheets be carried along the longitudinal axis to prevent sagging. Individual sheets can also be rolled up for easier handling.


Failure to comply with one or more of the above conditions will void the Boreart Architectural Products warranty.

Large orders of Boreart products are packaged and shipped in wooden crates and/or on 4'x4' wooden pallets.

HOW TO ORDER

To order a product, please write to info@boreart.ca using the following template to ensure maximum accuracy.

The first characters are the pattern code, followed by the melamine code, the panel material, the desired dimensions, and the last letters represent the complete color of the felt as well as its thickness.

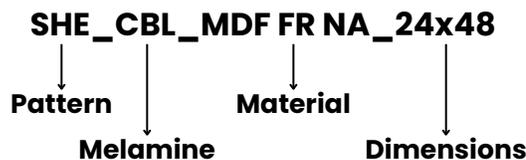

Pattern	Melamine	Material	Dimensions
Sherbrooke : SHE	White Oak : CBL	Natural MDF : MDF NA	24x24
	Brushed Oak : CBR	Black MDF : MDF NO	24x48
	Natural Walnut : NNA	Natural FR MDF : MDF FR NA	
	Ash Walnut : NCE	Black FR MDF : MDF FR NO	
	Black Walnut : NNO	Natural MR MDF : MDF MR NA	
		Black MR MDF : MDF MR NO	
		Particleboard : AGG	